


## ProCurve Wireless Edge Services xl Module

Working in conjunction with ProCurve radio ports, the ProCurve Wireless Edge Services xl Module provides centralized wireless LAN configuration and management of advanced wireless services, enabling a resilient, highly secure, mobile multi-service network. With the addition of the module, the ProCurve Switch 5300xl series enables network administrators to centrally manage a unified wired and wireless network using the complete ProCurve Manager networking management suite. This centralized approach to wired and wireless management streamlines device configuration. It enables network monitoring and response to wired and wireless network threats and administration of security and role-based user policies that are enforced at the edge of the network, regardless of how or where the user connects.



ProCurve Wireless Edge  
Services xl Module (J9001A)

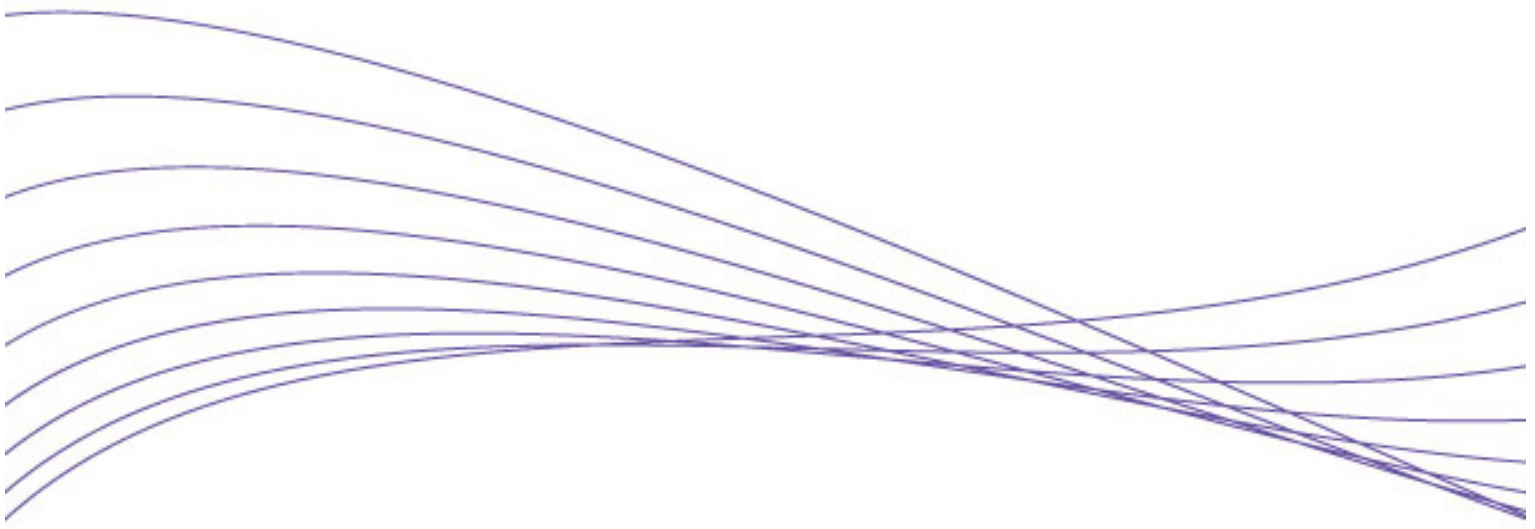

# ProCurve Wireless Edge Services xl Module

## Features and benefits

### Mobility

#### **NEW Layer 3 radio port adoption:**

Network-wide adoption and auto configuration of ProCurve radio ports enable rapid deployment of a wireless LAN with minimal network reconfiguration. By enabling radio port deployment at Layer 3, the wireless network provides fast network roaming to maintain uninterrupted application persistence.

**NEW Layer 3 mobility domain:** When configured as part of a Layer 3 mobility domain, ProCurve Wireless Edge Services xl Modules maintain client network connectivity as users roam across subnet boundaries and from module to module. A mobility domain may include up to 12 ProCurve Wireless Edge Services xl Modules.

**NEW Guest accounts:** The ProCurve Wireless Edge Services xl Module provides secure, Web authenticated guest access using the built-in RADIUS server. Guest account creation includes randomly generated or predefined individual user credentials and duration of access, including time of day. Termination of network access privileges is immediate upon expiration of the guest account.

**NEW Guest administration:** Assigned by the network administrator, guest administration privileges permit restricted access to the Web page used to manage guest accounts hosted internally on the Wireless Edge Services xl Module. Guest administrators may create, print, and delete guest accounts.

### Management

• **Centralized management:** A single point to configure system-wide wireless LAN setup and operation is provided, including SSID, security, and authentication options as well as advanced wireless services. Wireless LAN settings are automatically administered to designated ProCurve radio ports, eliminating the cost and time associated with individual configuration of access points.

#### • **Zero-configuration deployment:**

- **Automatic wireless LAN provisioning:** Upon installation of a Wireless Edge Services xl Module, the switch will automatically configure the module to discover and adopt ProCurve radio ports.

- **Layer 2 auto radio port discovery:** Simply connect each ProCurve radio port to a Power over Ethernet-enabled network port, and the device will be automatically discovered and configured by the Wireless Edge Services xl Module.

**NEW Wireless sFlow support:** With addition of sFlow sampling of wireless traffic, management applications such as ProCurve Manager Plus or other wireless sFlow-capable network analyzers, enable unified network visibility into traffic metrics—including wired and wireless network top talkers, top applications, and network connections. Wireless sFlow, when used in conjunction with ProCurve Network Immunity Manager, provides rapid identification and response to specific network threats on wired and wireless network connections.

### Connectivity

• **Modular network connectivity:** The modular design of the fully featured ProCurve Switch 5300xl series provides choice of port type, density, and Power over Ethernet capability to simplify network deployment, with expansion to scale as network needs change.

• **Scalable radio architecture:** The ProCurve family of radio ports provides choice and flexibility to address a wide range of deployment needs. Network architects can choose between flexible dual-radio (IEEE 802.11a and IEEE 802.11g) and highly cost-effective single-radio (IEEE 802.11g) designs, integrated or external antenna configurations, and customized housings for office area and in-ceiling deployment.

• **Auto Channel Select (ACS):** helps minimize radio co-channel interference by automatically selecting an unoccupied radio channel

# ProCurve Wireless Edge Services xl Module

- **Adjustable output power:** controls cell size for high-density access point deployments
- **IEEE 802.11h International Telecommunication Union (ITU) compliant:** Dynamic Frequency Selection (DFS) and Transmit Power Control (TPC) are employed to automatically select another channel and adjust transmit power to minimize interference with systems such as radar, if detected on the same channel.
- **International country configuration:** Centrally configured on the Wireless Edge Services xl Module, all ProCurve radio ports automatically adjust to match selected country regulatory requirements.

## Resiliency and high availability

- **Network self-healing:** In the event of a radio port failure, the module will automatically adjust transmit power and data rate on adjacent ProCurve radio ports to maintain wireless LAN coverage.
- **RF detection and interference avoidance:** The system automatically recalibrates radio port channel assignments to avoid environmental or other IEEE 802.11-based wireless interference.
- **Module redundancy:** If a primary Wireless Edge Services xl Module should fail, the ProCurve Redundant Wireless Services xl Module will automatically adopt the radio ports that were associated with the primary module.
- **Module power redundancy:** As an integrated service module for the ProCurve Switch 5300xl series, the module leverages the fully redundant, hot-swappable power supplies of the chassis for higher service uptime.

## Security

**NEW Stateful packet inspection firewall:** inspects and drops routed wireless packets with invalid TCP flags or corrupted packets and stops common denial-of-service attacks. Dropped packets are logged with the name and time of the attack.

**NEW Access control lists (ACLs):** provide IP Layer 3 filtering based on source/destination IP address/subnet and source/destination TCP/UDP port number

**NEW Network address translation (NAT):** Choice of dynamic or static NAT preserves a network's IP address pool or conceals the private address of network resources, such as Web servers, made accessible to users of a guest or public wireless LAN.

**NEW Enhanced Web authentication:** provides authentication for browser-based wireless clients. Built-in login, welcome, and failure Web pages assist users through the login process. In addition, the Wireless Edge Services xl Module can store custom Web pages or direct users to custom Web authentication pages on an external Web server.

**NEW MAC address lockout:** prevents configured particular MAC addresses from connecting to the network

• **RADIUS-based MAC authentication:** a wireless client is authenticated with a RADIUS server based on the MAC address of the client; this is useful for clients that have minimal or no user interface

• **IEEE 802.1X:** provides port-based user authentication with support for Extensible Authentication Protocol (EAP) MD-5, TLS, TTLS, and PEAP with choice of AES, TKIP, and static or dynamic WEP encryption for protecting wireless traffic between authenticated clients and the access point

• **Choice of IEEE 802.11i, Wi-Fi Protected Access 2 (WPA2), or WPA:** locks out unauthorized wireless access by authenticating users prior to granting network access; robust Advanced Encryption Standard (AES) or Temporal Key Integrity Protocol (TKIP) encryption secures the data integrity of the wireless traffic

• **ProCurve Identity Driven Manager (IDM) security and access control:**

- **Per-user ACLs:** User access to specific network resources is permitted or denied based

# ProCurve Wireless Edge Services xl Module

on user identity and time of day, so multiple types of users (employees, visitors, temporary workforce) on the same network can access specific network services without risk to network security or unauthorized access to sensitive data.

- **Automatic VLAN assignment:** Users are automatically assigned to the appropriate VLAN based on their identity, community, and time of day.

- **Traffic prioritization:** Traffic prioritization (QoS) is automatically set for each wireless client based on identity, community, location, and time of day.

- **Rate limits:** Ingress rate limits are automatically applied to user traffic based on identity, community, and time of day.

- **Secure management access:** all access methods--CLI, GUI, or MIB--are securely encrypted through SSHv2, SSL, and/or SNMPv3

- **Management VLAN:** secures management access to the access point; the management VLAN is used to manage the access point through remote management tools such as the Web interface, SSH, telnet, or SNMP

- **4 BSSIDs/16 SSIDs per radio:** Multiple wireless broadcast domains with separate security, authentication, and policy configuration per SSID provide access control of network resources based on user authentication and level of trusted security between the wireless user and the network.

- **Neighbor access point (rogue AP) detection:** The Wireless Edge Services xl Module provides a system-wide view of all access points detected in the wireless LAN coverage area. Discovered access points are easily classified as either approved or unapproved to simplify network monitoring of "rogue APs". Each ProCurve radio port simultaneously scans for the presence of other access points while servicing wireless clients. Radio ports can be configured as dedicated RF monitors for continuous monitoring of the RF environment.

**NEW Wireless intrusion detection:** The ProCurve Wireless Services xl Module monitors wireless

client activity for behavior harmful to the network. Upon detection of such behavior, the module will block the wireless client, log the attack, and generate a trap.

- **Inter-station traffic blocking:** prevents communication between client devices associated on the same radio port

- **Closed system:** restricts broadcast of SSID as a security measure to conceal presence of the wireless network

## Quality of Service (QoS)

- **Wi-Fi WMM support:** provides QoS functionality in wireless networks by prioritizing wireless traffic from different applications

- **SpectraLink voice priority (SVP) support:** prioritizes SpectraLink voice IP packets sent from a SpectraLink NetLink SVP server to SpectraLink wireless voice handsets to help ensure excellent voice quality

**NEW Unscheduled Automatic Power Save Delivery (uAPSD):** extends the battery life for Wi-Fi devices such as VoWLAN handsets.

## Configuration

**NEW Local RADIUS server:** supports wireless as well as wired user or device authentication using 802.1X, browser-based, or MAC authentication. Choice of authentication database includes the built-in, 500-user account database or authentication to an LDAP compliant directory. EAP methods supported include EAP-TLS, EAP-TTLS with MD5, EAP-TTLS with PAP, EAP-TTLS with GTC, and EAP-PEAP with MSCHAPv2.

**NEW Built-in DHCP server:** When configured, the ProCurve Wireless Edge Services xl Module responds to wired and wireless client DHCP (Dynamic Host Configuration Protocol) IP configuration requests. The DHCP server provides configuration responses including the assigned client IP address from network or host pools, lease time, default gateway, domain name,

# ProCurve Wireless Edge Services xl Module

DNS server addresses, and DHCP options. DHCP functionality also includes DHCP relay and Dynamic DNS.

## **Scalability**

**NEW Scalable network capacity:** The ProCurve Wireless Edge Services xl Module, as purchased, provides support for up to 12 ProCurve radio ports. The module easily accommodates additional radio port capacity with the purchase of the ProCurve Wireless Services Module 12 RP License. Each license provides support for an additional 12 ProCurve radio ports, for a maximum of 48 ProCurve radio ports per module. With support for two ProCurve Wireless Edge Services xl Modules per chassis, each switch in the 5300xl series can manage a total of 96 radio ports.

## **Industry-leading warranty**

- **Lifetime warranty** : for as long as you own the product, with next-business-day advance replacement (available in most countries)

# ProCurve Wireless Edge Services xl Module



## ProCurve Wireless Edge Services xl Module J9001A

---

### Specifications

---

#### Physical characteristics

Dimensions	8.0(d) x 8.97(w) x 1.75(h) in. (20.32 x 22.78 x 4.45 cm)
Weight	1.9 lb. (0.86 kg)

---

#### Environment

Operating temperature	41°F to 104°F (5°C to 40°C)
Operating relative humidity	15% to 80% @ 104°F (40°C), non-condensing
Non-operating/Storage temperature	-40°F to 158°F (-40°C to 70°C)
Non-operating/Storage relative humidity	20% to 90% @ 149°F (65°C), non-condensing
Altitude	up to 15000 ft. (4.6 km)

---

#### Wireless interface

---

#### Safety

EN 60950/IEC 60950; UL 60950

---

#### Emissions

EN 55022/CISPR 22 Class A

---

#### Immunity

EN	EN 55024, CISPR 24
ESD	IEC 61000-4-2
Radiated	IEC 61000-4-3
Surge	IEC 61000-4-5
Conducted	IEC 61000-4-6
Power frequency magnetic field	IEC 61000-4-8
Voltage dips and interruptions	IEC 61000-4-11

---

# ProCurve Wireless Edge Services xl Module

## Standards and Protocols

### Device Management

RFC 2068 Hypertext Transfer Protocol -- HTTP/1.1  
HTML and telnet management

### General Protocols

IEEE 802.1p Priority  
IEEE 802.1Q VLANs  
RFC 768 UDP  
RFC 783 TFTP Protocol (revision 2)  
RFC 791 IP  
RFC 792 ICMP  
RFC 793 TCP  
RFC 826 ARP  
RFC 854 TELNET  
RFC 894 IP over Ethernet  
RFC 959 File Transfer Protocol (FTP)  
RFC 1541 DHCP  
RFC 2030 Simple Network Time Protocol (SNTP) v4  
RFC 2784 Generic Routing Encapsulation (GRE)  
RFC 3046 DHCP Relay Agent Information Option

### IPv6

RFC 3162 RADIUS and IPv6

### MIBs

RFC 1213 MIB II  
RFC 1493 Bridge MIB

### Mobility

IEEE 802.11a High Speed Physical Layer in the 5 GHz Band  
IEEE 802.11b Higher-Speed Physical Layer Extension in the 2.4 GHz Band  
IEEE 802.11g Further Higher Data Rate Extension in the 2.4 GHz Band  
IEEE 802.11i Medium Access Control (MAC) Security Enhancements

### Network Management

RFC 3164 BSD syslog Protocol  
RFC 3176 sFlow  
SNMPv1/v2c/v3

### Security

IEEE 802.1X Port Based Network Access Control

RFC 2138 RADIUS Authentication  
RFC 2548 Microsoft Vendor-specific RADIUS Attributes  
RFC 2809 L2TP Compulsory Tunneling via RADIUS  
RFC 2865 RADIUS Authentication  
RFC 2866 RADIUS Accounting  
RFC 2867 RADIUS Accounting Modifications for Tunnel Protocol Support  
RFC 2868 RADIUS Attributes for Tunnel Protocol Support  
RFC 2869 RADIUS Extensions  
RFC 2882 NAS Requirements: Extended RADIUS Practices  
RFC 3576 Dynamic Authorization Extensions to RADIUS  
RFC 3579 RADIUS Support For Extensible Authentication Protocol (EAP)  
RFC 3580 IEEE 802.1X RADIUS Digest Authentication  
RFC 4590 RADIUS Extension for Secure Sockets Layer (SSL)  
SSHv2 Secure Shell  
WPA (Wi-Fi Protected Access)

## Accessories

---



### Physical characteristics

Dimensions: 8.97(d) x 8.0(w) x 1.75(h)  
in. (22.78 x 20.32 x 4.45 cm)

Weight: 1.9 lb. (0.86 kg)

### **NEW** ProCurve Redundant Wireless Services xl Module (J9003A)

The redundant module automatically adopts ProCurve radio ports if the primary ProCurve Wireless Edge Services xl Module is unavailable or should fail.

---



### ProCurve Wireless Services Module 12 RP License (J9002A)

The ProCurve Wireless Services Module 12 RP License provides support for 12 additional ProCurve radio ports on a Wireless Edge Services xl Module, for a maximum of 48 radio ports per module.

---

© 2007 Hewlett-Packard Development Company, L.P. The information contained herein is subject to change without notice. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.



7/19/2007

To learn more, visit [www.procurve.com](http://www.procurve.com)

Information is subject to change without notice